

MAAOA/215-Series Toggle Switches



The MAAOA/215-Series toggle switches are single pole, AC rated at 20 amps and 125 VAC. These switches are snap-in mounted, with a phenolic toggle and base, and are suitable for high ambient temperature applications including Coffee Makers and Food Warmers.

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts

Electrical Life

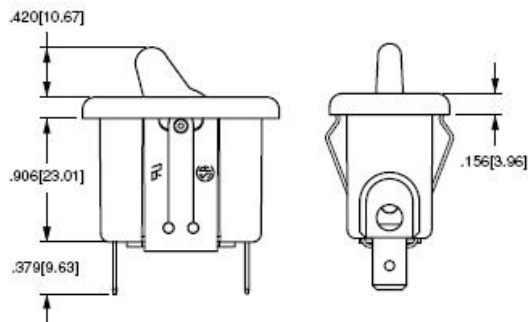
25,000 cycles




Mechanical Life


100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)



		
.250 TAB (Q.C.)	SCREW (ASSEMBLED)	INTEGRATED WIRE LEAD (no exposed conductors)
TERMINAL TYPE		



MOUNTING HOLE

Panel Thickness: .030[.762] min - .090[2.28] max.
Specific cutout dimension range dependent on panel thickness and material.

MAAOA - **BL** / **ON-OFF**

1
Base Part Number

2
Color

3
Legend

1 BASE PART NUMBER: SERIES/CIRCUITRY/RATING/TERMINATION			
10A 250 VAC, 20A 125 VAC, 1/2 HP 125-250 VAC			
	.250 Tabs	Screw Term	Wire Leads
Single Pole			
ON-OFF	MAAOA	215	215A
(ON)-OFF	MM-021	-	-

2 BASE & ACTUATOR COLOR

BL black BN brown

3 LEGEND¹

ON-OFF

NOTES

Panel Cut-Out recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

1 Imprinting is available. ON-OFF legend is not standard and must be specified after color. If not specified, switch will be manufactured with no legend.

() Indicates momentary function.